


Dimension sheet

Deep Pano lug cap with PVC- or BLUESEAL[®]-Compound

Closure diameter		58 mm	66 mm	82 mm
Closure type		DTO, DOB	DTO, DOB	DTO, DOB
k-value, closure +/-0.2 [mm]*		13.5	13.5	13.33
Technical data				
Plate	Tinplate acc. EN 10202:2001, tin weight 2.0 g/m ² per side			
Closure diameter outside +/-0.15 [mm]	A2	60.21	69.2	85.14
Diameter inside / caliber min. [mm]	C2	53.1	62.25	78.15
Closure height +/-0.3 [mm]	S4	14.45 15.05	14.7 15.3	14.45 15.05
Number lugs		4	4	6
Compound thickness (incl. plate) min./max. [mm]	Cp	1.15 1.35	1.15 1.35	1.15 1.35
Plate diameter [mm]	Sp	44	55	70
Button insertion max. [mbar]		250	250	250
Button recoil min. [mbar]		30	30	30

*based on DIN EN ISO 9100 1-14

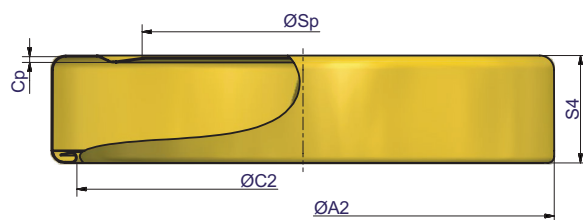

Version 02 · 2017-06-01